



MULMUF LTD.

MANUFACTURERS OF EXHAUSTS FOR INDUSTRY & OFF-ROAD EQUIPMENT







Engine Exhaust Silencer - CRITICAL GRADE

Part Number	A (mm)	B (mm)	D (mm)
BB50.8	50.8	127	540
BB63.5	63.5	355.6	1168.4
BB76.2	76.2	406.4	1300
BB88.9	88.9	457.2	1450
BB101.6	101.6	457.2	1650
BB127	127	508	1850
BB152.4	152.4	558.8	2150
BB203.2	203.2	635	2550
BB254	254	736.6	2950
BB304.8	304.8	914.4	3700
BB355.6	355.6	1066.8	3800
BB406.4	406.4	1116	4200
BB457.2	457.2	1280	4800
BB508	508	1524	5500

Part Number	A (mm)	B (mm)	C (mm)	E (mm)	F (mm)
BC50.8	50.8	127	540	120	60
BC63.5	63.5	355.6	1050	230	70
BC76.2	76.2	406.4	1250	280	90
BC88.9	88.9	457.2	1375	300	150
BC101.6	101.6	457.2	1575	300	160
BC127	127	508	1750	330	180
BC152.4	152.4	558.8	2050	380	190
BC203.2	203.2	635	2475	417	220
BC254	254	736.6	2875	468	250
BC304.8	304.8	914.4	3600	557	280
BC355.6	355.6	1066.8	3700	633	320
BC406.4	406.4	1116	4100	658	340
BC457.2	457.2	1280	4700	740	370
BC508	508	1524	5400	862	400

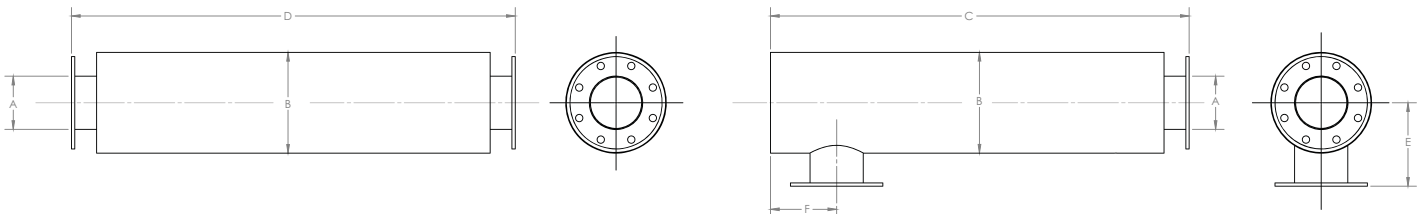

127mm and smaller standard cuff adaptors with 4 slotted connections. 127mm and larger with 150# ANSI flanged connections. Dimensions in millimetres. Dimensions are nominal and may vary slightly with production models.

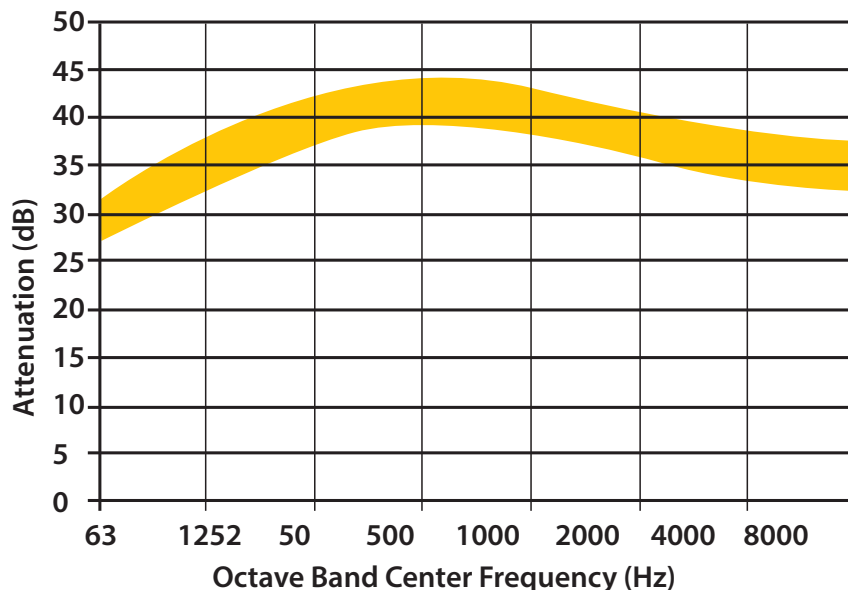

- Typical reduction: 35-40dB
- Aluminised / carbon steel construction
- Stainless steel construction available
- Custom fit applications available

MULMUF (NI) LTD

105 Cavan Road, Bush, Dungannon,
Co. Tyrone, N. Ireland. BT71 6QN
T: +44 (0) 28 8772 7992 • E: sales@mulmuf.com

MULMUF LTD

Sligo Rd, Tubbercurry, Co. Sligo, Ireland
T: +353 (0) 7191 85594
E: sales@mulmuf.com







Engine Exhaust Silencer - RESIDENTIAL GRADE

Part Number	A (mm)	B (mm)	D (mm)
CC50.8	50.8	127	540
CC63.5	63.5	203	720
CC76.2	76.2	203	830
CC88.9	88.9	254	1069
CC101.6	101.6	254	1069
CC127	127	500	1000
CC152.4	152.4	457	2052
CC203.2	203.2	660	2260
CC254	254	750	1450
CC304.8	304.8	850	1700
CC355.6	355.6	1016	2000
CC406.4	406.4	1166	2200
CC457.2	457.2	1310	2500
CC508	508	1410	2700

Part Number	A (mm)	B (mm)	C (mm)	E (mm)	F (mm)
CD50.8	50.8	127	540	120	60
CD63.5	63.5	203	720	162	70
CD76.2	76.2	203	830	162	90
CD88.9	88.9	254	1069	200	150
CD101.6	101.6	254	1069	200	160
CD127	127	500	925	330	180
CD152.4	152.4	457	2052	300	190
CD203.2	203.2	660	2260	405	220
CD254	254	750	1378	470	250
CD304.8	304.8	850	1600	520	280
CD355.6	355.6	1016	1900	600	320
CD406.4	406.4	1166	2100	650	340
CD457.2	457.2	1310	2400	735	370
CD508	508	1410	2600	785	400

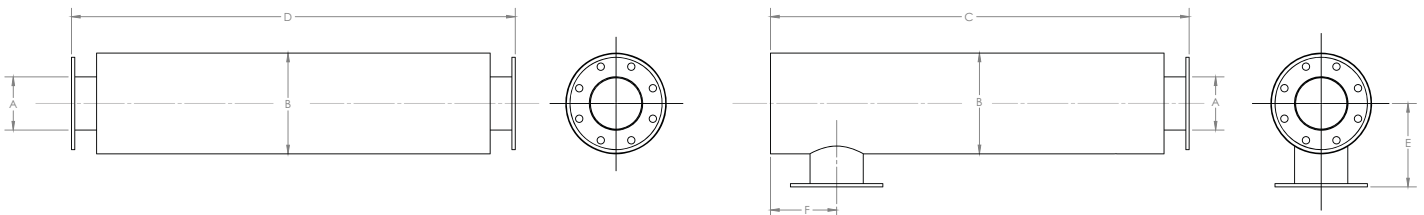

127mm and smaller standard cuff adaptors with 4 slotted connections. 127mm and larger with 150# ANSI flanged connections.
Dimensions in millimetres. Dimensions are nominal and may vary slightly with production models.

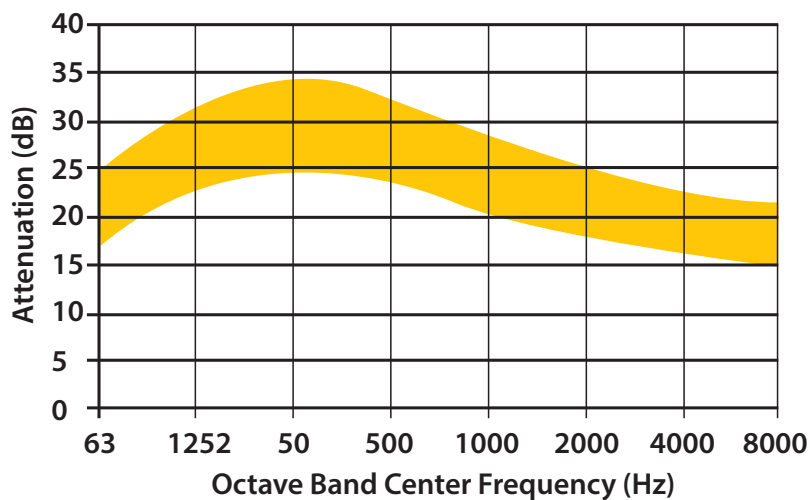

- Typical reduction: 18-25dB
- Aluminised / carbon steel construction
- Stainless steel construction available
- Custom fit applications available

MULMUF (NI) LTD

105 Cavan Road, Bush, Dungannon,
Co. Tyrone, N. Ireland. BT71 6QN
T: +44 (0) 28 8772 7992 • E: sales@mulmuf.com

MULMUF LTD

Sligo Rd, Tubbercurry, Co. Sligo, Ireland
T: +353 (0) 7191 85594
E: sales@mulmuf.com







Engine Exhaust Silencer - INDUSTRIAL GRADE

Part Number	A (mm)	B (mm)	D (mm)
DD50.8	50.8	127	540
DD63.5	63.5	152	663
DD76.2	76.2	152	803
DD88.9	88.9	203	893
DD101.6	101.6	203	893
DD127	127	280	1070
DD152.4	152.4	302	1342
DD203.2	203.2	355	1652
DD254	254	558.8	1900
DD304.8	304.8	660.4	2400
DD355.6	355.6	762	2400
DD406.4	406.4	914.4	2800
DD457.2	457.2	1066.8	3000
DD508	508	1219.2	3000

Part Number	A (mm)	B (mm)	C (mm)	E (mm)	F (mm)
DE50.8	50.8	127	540	120	60
DE63.5	63.5	152	663	130	70
DE76.2	76.2	152	803	130	90
DE88.9	88.9	203	893	164	150
DE101.6	101.6	203	893	164	150
DE127	127	280	1070	200	180
DE152.4	152.4	302	1342	255	190
DE203.2	203.2	355	1652	280	220
DE254	254	558.8	1820	430	250
DE304.8	307.8	660.4	2300	480	280
DE355.6	355.6	762	2300	480	320
DE406.4	406.4	914.4	2700	550	340
DE457.2	457.2	1066.8	3000	550	370
DE508	508	1219.2	3000	640	400

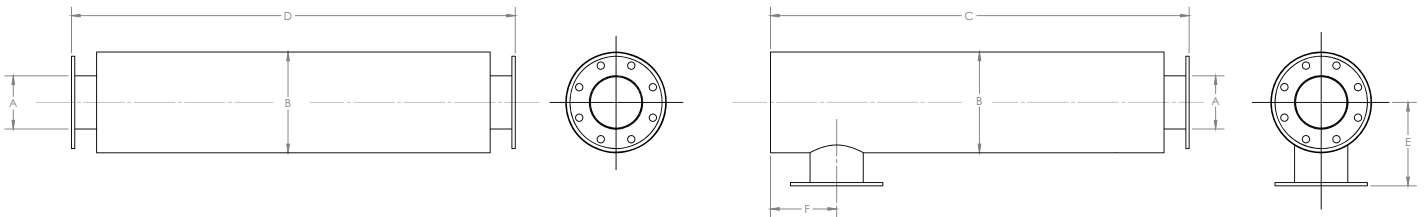

127mm and smaller standard cuff adaptors with 4 slotted connections. 127mm and larger with 150# ANSI flanged connections. Dimensions in millimetres. Dimensions are nominal and may vary slightly with production models.

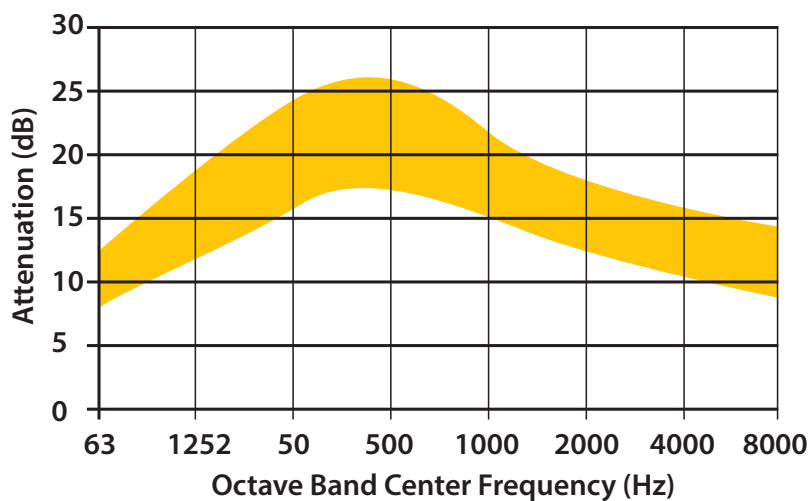

- Typical reduction: 12-18dB
- Aluminised / carbon steel construction
- Stainless steel construction available
- Custom fit applications available

MULMUF (NI) LTD

105 Cavan Road, Bush, Dungannon,
Co. Tyrone, N. Ireland. BT71 6QN
T: +44 (0) 28 8772 7992 • E: sales@mulmuf.com

MULMUF LTD

Sligo Rd, Tubbercurry, Co. Sligo, Ireland
T: +353 (0) 7191 85594
E: sales@mulmuf.com

